

SmartCNX™



Capability meets simplicity



Nice



The future of smart, connected gate automation

We've joined the best of Nice and HySecurity to build best in class commercial swing and slide gate operators



SlideSmart CNX and **SwingSmart CNX** require professional installation

SmartCNX Installer Smartphone App

SmartCNX Installer smartphone app for full control from your phone

- Bluetooth connection to smartphones
- Intuitive to use
- Full control of operator settings



Brushless DC motor

- More power in a smaller size
- Excellent control for accurate start and stop locations
- Faster obstruction detection
- Less stress on electronic drive components for reliability and long life

I/O Expansion Board

Provides 8 additional relay outputs and 8 additional digital inputs to cover the needs of the most complex installations.

The SmartCNX controller provides a library of ready configurations to take the effort out of control system design.





SMART

- SmartCNX installer app
- Intelligent inputs take pulsed or 10K resistive sensors
- BlueBUS input
- Extended history event log
- 5 programmable digital inputs for sensors, detectors, or other access controls
- Dedicated inputs for dual gate and sequenced gates
- Toolless wire terminals
- 3 programmable relay outputs



Cast steel arm with integral protection from pinch points

- 4 Hy5B™ vehicle detector slots
- USB port for software updates and log files
- Nice OXI receiver

RELIABLE

- Solid state non-contact limit sensors
- Super quiet, super reliable direct drive gear train
- Locking covers prevents tampering and theft
- Covers are injection molded from high impact, fade resistant resin
- Tight fitting covers seal out rain and deters rodents and small pests
- Front cover access for service needs
- Two 8Ah batteries for up to 300 cycles on power loss.
- 5 year warranty / 7 year single-family



Adjustable overload protection




USB port for software updates and log files


CONNECTED

Integrated HyNet™ Technology provides remote management capabilities

- Remotely monitor the gate operator
- Remotely manage operator settings
- Control your HySecurity operator from your security platform
- Remotely update software to your operator
- Troubleshoot gate errors and faults
- Check cycle count
- Automatic notification of alerts and faults

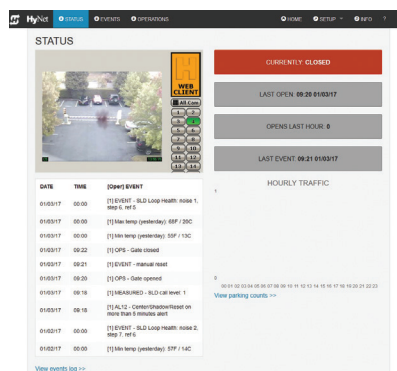

Event Log View gate events, alerts, logs and parking counts

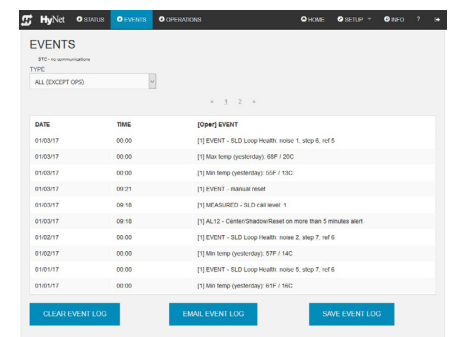

Status Screen Monitor gate status and cycle counts

Specification table

Model	SlideSmart CNX 15
Duty Cycle	Continuous
Horsepower	Equivalent to 1/2 hp
Drive	Electromechanical - 24V Brushless DC motor with direct drive gear train
Rate of Travel	0.75, 1 or 1.25 ft/s (23, 30 or 38 cm/s)** Open/Close speed set independently
Gate Length Max.	50 ft (15 m)
Gate Weight Max.	1,500 lb (680 kg)
Pull Force	300 lb
UPS Battery Backup Cycles	Field configurable to fail open or secure when batteries deplete. Standard battery backup gate travel: Two 8Ah batteries. Up to 4,000 ft (1,219 m) after AC power loss. Extended battery backup gate travel: Two 35Ah batteries. Up to 18,000 ft (5,486 m) after AC power loss.
Temperature Rating	-13° to 158° F (-25° to 70° C)
Operating Voltage	24VDC
Input Voltage	Switch select 115V or 208-230V, 60/50 Hz; Solar: 24V solar panels †
Accessory Power	24VDC at each input & SS relay (2A accumulative)
Included Accessories	30 ft (9 m) of #40 corrosion resistant roller chain, two cast steel gate mounting brackets for bolt-on or welded assembly, one Nice EPMAB through-beam photo eye with BlueBUS technology, one 5-foot premium ASO edge sensor and two 8Ah batteries for backup power
Communication	BlueBUS, USB, Ethernet, T4, RS-485, Bluetooth, OXI receiver
User Controls	SmartCNX Controller with 70+ configurable settings. 32 character OLED display and 7 tactile buttons, or Bluetooth smartphone interface, for programming.
Inputs	15 inputs including 5 control inputs, 2 dedicated entrapment sensor inputs, 3 user programmable inputs, a BlueBUS port, and 4 Hy5B vehicle detectors sockets. Optional SmartCNX™ I/O Expansion module for 8 additional user programmable inputs.
Relays	3 configurable user relays: Two - 30VDC, 2A solid state. One 250VAC, 20A electromechanical; Optional SmartCNX I/O Expansion module for 8 additional relay outputs.
Finish	Zinc rich primer with black powder coated chassis. High impact copolymer cover.
ETL Listed (UL 325)	Usage Class I, II, III, IV
Warranty	5 year (7 year single-family residential) w/product registration

* Speed setting cannot be configured to exceed 1 ft/s for Usage Class I and II.

** The actual number of gate cycles available from battery depends upon gate resistance to travel, cycle length, battery size, state of charge and health, ambient temperature, accessory power draw and frequency of gate cycles during power outage.



Model	SwingSmart CNX 20
Single or Twin	Single leaf
Duty Cycle	Continuous
Horsepower	Equivalent to 1/2 hp
Drive	Electromechanical - 24V Brushless DC motor with direct drive power train
Open/Close Time	Open/Close time set independently.
Gate Length Max.	20 ft (6 m) each leaf
Gate Weight Max.	1,300 lb (590 kg) for 12 ft (4 m) leaf; 800 lb (363 kg) for a 16 ft (5 m) leaf; 600 lb (272 kg) for a 20 ft (6 m) leaf
UPS Battery Backup Cycles	Field configurable to fail open or secure when batteries deplete. Standard battery backup gate travel: Two 12V 8Ah batteries. Up to 300 cycles after AC power loss. Extended battery backup gate travel: Two 12V 35Ah batteries. Up to 1,000 cycles after AC power loss.
Temperature Rating	-13° to 158° F (-25° to 70° C)
Operating Voltage	24VDC
Input Voltage	Switch select 115V or 208-230V, 60/50 Hz; Solar: 24V solar panels †
Accessory Power	24VDC at each input & SS relay (2A accumulative)
Included Accessories	One Nice EPMA B through-beam photo eye with BlueBUS technology and two 8Ah batteries for backup power.
Communication	BlueBUS, USB, Ethernet, T4, RS-485, Bluetooth, OXI receiver
User Controls	SmartCNX Controller with 70+ configurable settings. 32 character OLED display and 7 tactile buttons, or Bluetooth smartphone interface, for programming.
Inputs	15 inputs including 5 control inputs, 2 dedicated entrapment sensor inputs, 3 user programmable inputs, a BlueBUS port, and 4 Hy5B vehicle detectors sockets. Optional SmartCNX™ I/O Expansion module for 8 additional user programmable inputs.
Relays	3 configurable user relays: Two - 30VDC, 2A solid state. One 250VAC, 20A electromechanical; Optional SmartCNX I/O Expansion module for 8 additional relay outputs.
Finish	Zinc rich primer with black powder coated chassis. High impact copolymer cover.
ETL Listed (UL 325)	Usage Class I, II, III, IV
Warranty	5 year (7 year single-family residential) w/product registration

* The actual number of gate cycles available from battery depends upon gate resistance to travel, cycle length, battery size, state of charge and health, ambient temperature, accessory power draw and frequency of gate cycles during power outage.



SIMPLE. HySecurity strives for simplicity. Our products are easy to install, configure, maintain, troubleshoot and repair.

RELIABLE. HySecurity operators last decades under the harshest climates and conditions.

SECURE. HySecurity is the most used operator on critical infrastructure sites worldwide.



Contact Nice | HySecurity for an operator/parts distributor near you.
phone 253-867-3700 | 800-321-9947
hysecurity.com | sales@hysecurity.com



PN: 948109606 | D0951 092822