


# 636

## Legacy, long-lasting residential control board

Full analog controls for quick and easy setup. Perfect for remote properties with solar power.

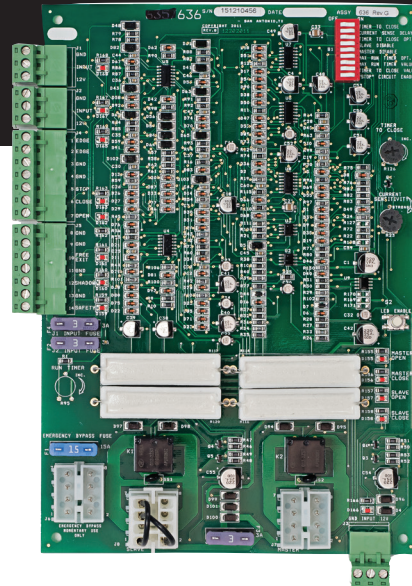

### Features:



**Easy setup:**

Analog controls makes setup very fast



**Efficient:**

Low power consumption - longer battery life in solar applications



**Proven design:**

Great track record for over 20 years




**Compact:**

Easy to install in tight spaces

# 636 Control Board

For use with  
Apollo Linear  
Actuator

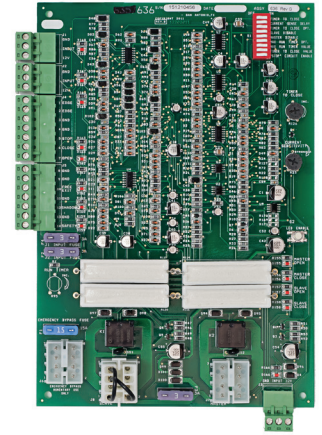

## Technical Specifications

<b>Model</b>	636US
<b>Solar</b>	External solar charger required
<b>Single or Dual Gate</b>	Single or dual
<b>Gate Sync</b>	No
<b>Slide Compatible</b>	No
<b>Swing Compatible</b>	Apollo Linear Actuator
<b>Temperature Rating</b>	-4 F to 122 F (-20 C to 50 C)
<b>Input Voltage</b>	12 VDC
<b>Operating Voltage</b>	12 VDC
<b>Maximum Current</b>	15A
<b>Standby Current</b>	15mA
<b>Accessory Power</b>	(3) fused 12 volt outputs - each fused by a 3A fuse
<b>BlueBUS</b>	No
<b>Board Dimensions</b>	6.5w x 8.5h x 1.75d inches
<b>Communciation</b>	None
<b>User Controls</b>	All analog
<b>Inputs</b>	Open, Close, Stop
<b>Relays</b>	None
<b>ETL Listed (UL 325)</b>	Not Certified
<b>External Entrapment Sensor Options</b>	Normally Open relay based; Loops: Obstruction, Shadow, Exit
<b>Important Notes</b>	3 year w/product registration

## Operators



Apollo Linear Actuator

## Control Boxes



**CBOX**  
with 636  
Control Board  
Ideal for Solar  
Installations

18w x 18h x 8d inch

Find information on Federal Income Tax Residential Solar Credit here:  
<https://support.hysecurity.com/hc/en-us/articles/4411636518807-Residential-Solar-Tax-Credit>



Contact Nice for an operator/parts distributor near you.  
phone 253-867-3700 | 800-321-9947  
[hysecurity.com](http://hysecurity.com) | [sales@hysecurity.com](mailto:sales@hysecurity.com)