


SlideDriver™ II Modular

Locates a separate lockable HydraSupply II enclosure away from the gate for situations involving unique mounting, special security (including blast mitigation), or areas requiring a noise reduction.

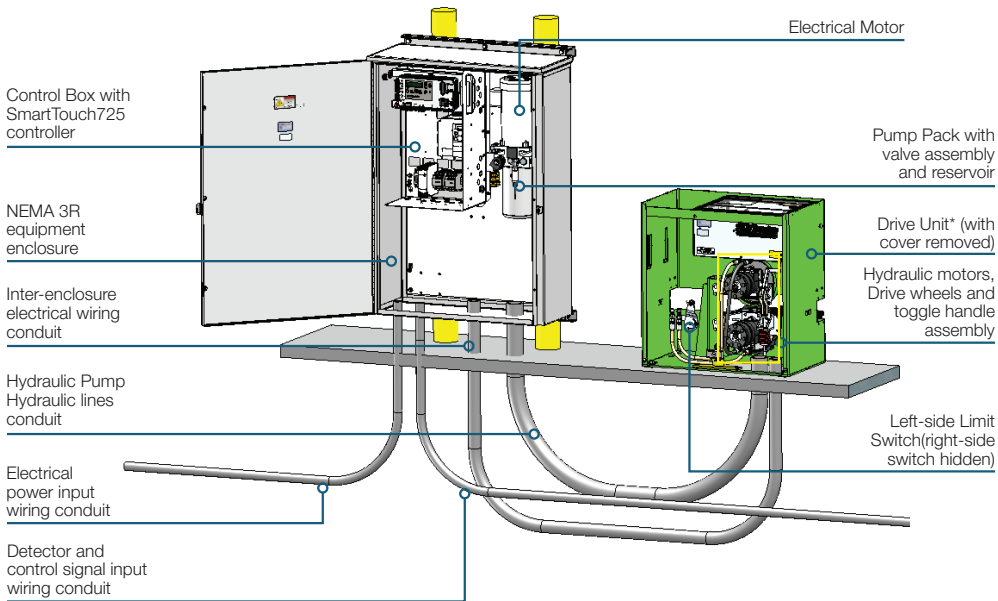

* Drive Unit with two Hydraulic Motors show; Drive Unit with four Hydraulic Motors is similar.

** The optional Heater requires a separate electrical conduit (not shown) between the Control Box and Drive Unit.



Applicable Models

- SlideDriver II SD40-M
- SD50F-M
- SD80V-M
- SD200V-M

Engineered with the **NEW SmartTouch725**



Features

Highest security

Threat of vandalism or unauthorized operator programming is greatly reduced with the remotely located HydraSupply II containing the SmartTouch725 Controller, electric motor assembly, and pump pack. The only parts remaining in the operator are drive wheels, hydraulic motors and limit switches.

Blast mitigation

In factories or other areas where gases or airborne particulates could pose an explosive danger, modular SlideDrivers remotely locate most electrical components, protecting against possible ignition of combustible materials.

Noise mitigation

Choose modular for noise-sensitive sites

Notes

HydraSupply II enclosure may be located up to 100 ft (30.5 m) from operator. For longer than 100 ft runs, or extremely cold climates, call HySecurity for hose specifications. Operator price includes up to 50 ft (15 m) of 3/8 inch braided hydraulic hose (custom cut to size by HySecurity according to installer's field measurements). Hoses are pre-filled with hydraulic fluid and supplied with quick disconnects.

This operator requires external Monitored Entrapment Protection Sensor(s) in both directions of travel.

Visit www.hysecurity.com/gatesafety for current list of HySecurity and UL or ETL approved external sensors and sensor accessories.