


# Hy8Relay™

## Add 8 User Relays to your HySecurity Operator

The customized Hy8Relay™ module provides eight additional user relays for integration with HySecurity's intelligent Smart Touch and Smart DC Controllers. Simple installation and direct communication expands the number of user relay functions available for all Smart Touch and Smart DC controllers with up-to-date software.

### Smart and Flexible

- For use with all HySecurity Operators
- Provides eight additional user relays
- Integrated with Smart Touch and Smart DC controllers using V2.95 or newer S.T.A.R.T. (Smart Touch Analyze & Retrieve Tool)
- Wiring harness - 4 wires; two to Dual Gate A & B; two to RS-485
- Two models - Smart DC Controller - MX3307-01 and Smart Touch Controller - MX3307-02

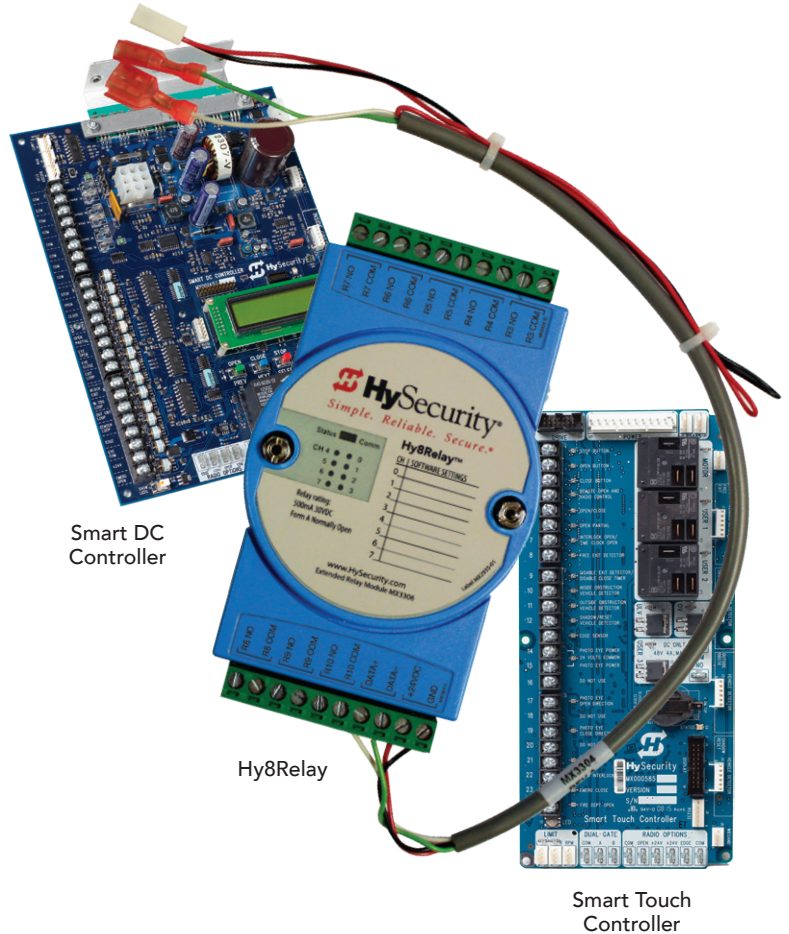

### SPECIFICATIONS

#### Relay Output

Channel:

8 Form A

Contact Rating:

AC: .5A @ 120VAC, .25A @ 240VAC  
DC: 1A @ 30VDC

#### Power

Power Consumption:

1.8W @ 24VDC

Certifications:

CE, FCC, Class A, UL

